



# Process Equipment

Pumping Solutions for Process Industries



PROVEN QUALITY. LEADING TECHNOLOGY.

# Husky Air-Operated Double Diaphragm Pumps

## Husky™ Pumping Technology

Our Husky air-operated double diaphragm pumps are loaded with features to help you get the job done right, every time, and are built to save you money.

### Rugged construction

Resists corrosion for reliable performance and long life

**Heavy-duty design** - Offers long life, increased productivity and lower overall cost of ownership

**Flow rates** up to 300 gpm (1135 lpm)

**Lube-free** for cleaner operation

**DataTrak™** available to prevent pump runaway and track material usage



### Husky 3300

3 in (76.2 mm) connection  
Max flow: 300 gpm (1135 lpm)  
Polypropylene, aluminum,  
stainless steel



### Husky 2200

2 in (50.8 mm) connection  
Max flow: 200 gpm (757 lpm)  
Polypropylene, PVDF



### Husky 2150

2 in (50.8 mm) connection  
Max flow: 150 gpm (568 lpm)  
Polypropylene, PVDF, aluminum,  
stainless steel, iron



### Husky 15120

1-1/2 in (38.1 mm) connection  
Max flow: 120 gpm (454 lpm)  
Polypropylene, PVDF



### Husky 1590

1-1/2 in (38.1 mm) connection  
Max flow: 90 gpm (340 lpm)  
Polypropylene, PVDF, aluminum,  
stainless steel



### Husky 1050


1 in (25.4 mm) connection  
Max flow: 50 gpm (189 lpm)  
Aluminum, polypropylene, PVDF,  
conductive polypropylene, hastelloy,  
stainless steel

# The Husky Advantage Loaded with Options


Choose from a wide selection of materials to handle numerous applications, including corrosive and abrasive fluid transfer.

## Key Fluids

- Paints, stains, coatings, inks and dyes
- Chemicals
- Acids
- Corrosive and abrasive fluids
- Lubricants
- Ceramic glazes
- Sludge, slurry and waste fluid
- Soaps, detergents and solvents

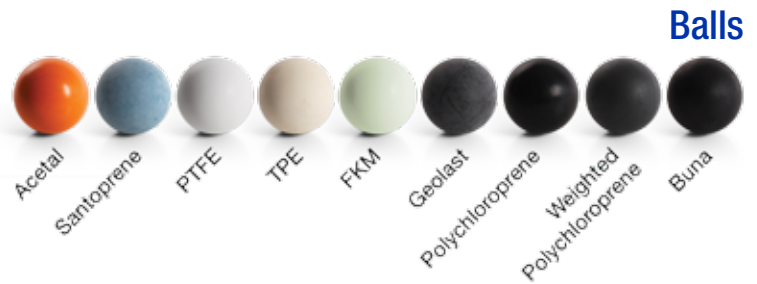

**Balls**

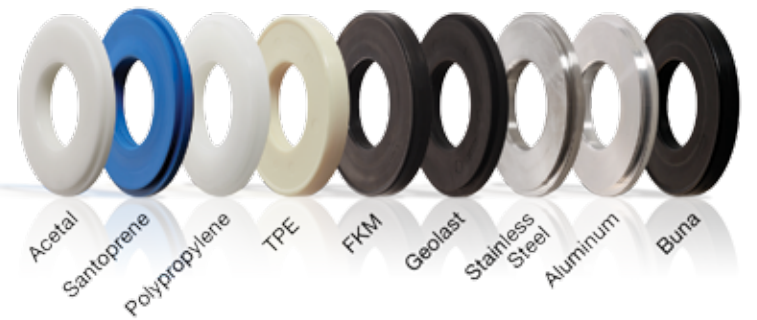

**Seats**



**Diaphragms**



**Husky 1050HP**

1 in (25.4 mm) connection  
Max flow: 50 gpm (189 lpm)  
Aluminum and stainless steel



**Husky 716**

3/4 in (19.1 mm) connection  
Max flow: 16 gpm (61 lpm)  
Aluminum, stainless steel



**Husky 515**

1/2 in (12.7 mm) connection  
Max flow: 15 gpm (57 lpm)  
Polypropylene, acetal, PVDF



**Husky 307**

3/8 in (9.4 mm) connection  
Max flow: 7 gpm (26 lpm)  
Polypropylene, acetal



**Husky 205**

1/4 in (6.3 mm) connection  
Max flow: 5 gpm (19 lpm)  
Polypropylene, acetal, PVDF

*Available materials of construction and accessories may vary depending on pump model.*

## EP Series Peristaltic Hose Pumps

Graco's positive displacement hose pumps rotate a full 360-degrees. Because they use a single roller to compress the hose once per revolution, your hoses last longer so you have less maintenance and downtime.

### Efficient Pumping Action

One hose compression per revolution extends hose life

### Low Maintenance

Quick replacement of hose

**Removable Cover** - Easier access to internal parts, making maintenance fast and simple

**Integral Drive Train** - Pump speeds as low as 1 rpm

### Hose Clamp Assembly

One-piece "quick change" assembly for easy service



### EP2

Max flow: 0.8 gpm (3.0 lpm)  
Ideal for chemical metering applications



### EP3

Max flow: 2.4 gpm (9.0 lpm)  
Typically used for chemical metering and sanitary applications



### EP4


Max flow: 19.5 gpm (73.8 lpm)  
Ideal for abrasive material transfer applications

## Hoses Built to Handle the Toughest Jobs

Only the interior of the hose is in contact with the fluid being pumped, making it easy to sterilize and clean the inside pumping surfaces. The gentle pumping action is ideal for shear sensitive materials and fragile cell cultures.

### Innovative Hose Design

Graco's 360-degree hose pump is designed to put 40% less stress on the hose compared to conventional shoe pumps running at the same flow rate. The hoses are highly engineered for long life and durability and are available in a wide variety of configurations for the most demanding applications and materials.

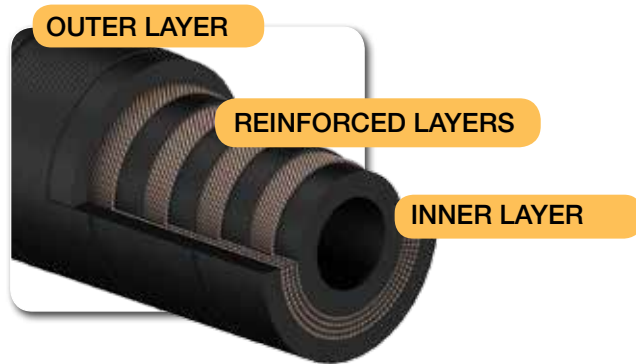

Choose from 4 different hose materials to meet your specific application requirements

Hose Materials	Stripe Color / Inside Color	Max. Fluid Temperature
Natural Rubber (NR)	None / Black	160°F (71°C)
Nitrile Rubber (NBR)	Yellow / Black	220°F (104°C)
Ethylene propylene (EPDM)	Blue / Black	250°F (121°C)
Chlorosulfonated polyethylene (CSM)	Orange / Black	250°F (121°C)

# Ink Pumps

## Long-Lasting piston pumps with sealed wet cup.

Prolonged seal life with enclosed, dual seal wet cup

Runaway control with optional DataTrak

MaxLife® seal for longer life

Handles the most difficult inks

Hydraulic or pneumatic motors



### Priming Piston Ink Pump

Enclosed, dual seal wet cup for longer seal life. Runaway control with optional DataTrak™

### Hydraulic Ink Pump

Up to 3 times more efficient than pneumatic pumps  
 Typical applications:  
 - Letterpress inks  
 - Lithographic inks

## Hydra-Clean® On-Demand High Pressure Cleaning

Graco Hydra-Clean heavy-duty pressure washers are perfect for use in a variety of in-plant cleaning applications and can be used with hot or cold water, detergents or strong chemical solutions up to 200°F (93°C).

Wall-mount and cart-mount options

Air or hydraulic powered units

300 Series Stainless Steel Lower

Compatible with many extreme chemicals and ideal for use with open-head drums

Supports multiple guns

Five different spray tips – Standard

Optional hose reel – Easy hose storage



## Husky Transfer Pumps

Easily pump from 55 gallon drum with flow rates up to 16 gpm (61 lpm). Available in aluminum, carbon steel, stainless steel and polypropylene.

**Suction tube** immersed inside the drum

**Quick-priming** and immediate flow of product

**Fluid viscosities up to 5,000 cps**  
and solids up to 0.09 in (2.29 mm)

**Air tight seal** for moisture-sensitive fluids

**Bung adapter** fits into any 2 in (50.8 mm) bung opening



## Fast-Flo® 1:1 Transfer Pumps

Deliver a smooth, reliable flow. Drum length and stubby models are available in either carbon steel or stainless steel materials of construction. Ideal for a variety of non-corrosive and corrosive materials.

**Flow rates** up to 5 gpm

**Immersed inlet** for faster priming of heavier fluids

**Air-powered** for high reliability and low cost

**Disc check** options for lower viscosity fluids





## ABOUT GRACO

### PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

## GRACO LOCATIONS

### MAILING ADDRESS

P.O. Box 1441  
Minneapolis, MN 55440-1441  
Tel: 612-623-6000  
Fax: 612-623-6777

### AMERICAS

#### MINNESOTA

Worldwide Headquarters  
Graco Inc.  
88-11th Avenue N.E.  
Minneapolis, MN 55413

### EUROPE

#### BELGIUM

European Headquarters  
Graco N.V.  
Industrieterrein-Oude Bunders  
Slakweidestraat 31  
3630 Maasmechelen,  
Belgium  
Tel: 32 89 770 700  
Fax: 32 89 770 777

### ASIA PACIFIC

#### AUSTRALIA

Graco Australia Pty Ltd.  
Suite 17, 2 Enterprise Drive  
Bundoora, Victoria 3083  
Australia  
Tel: 61 3 9468 8500  
Fax: 61 3 9468 8599

#### CHINA

Graco Hong Kong Ltd.  
Shanghai Representative Office  
Building 7  
1029 Zhongshan Road South  
Huangpu District  
Shanghai 200011  
The People's Republic of China  
Tel: 86 21 649 50088  
Fax: 86 21 649 50077

### INDIA

Graco Hong Kong Ltd.  
India Liaison Office  
Room 443, Augusta Point  
Regus Business Centre 53  
Golf Course Road  
Gurgaon, Haryana  
India 122001  
Tel: 91 124 435 4208  
Fax: 91 124 435 4001

### JAPAN

Graco K.K.  
1-27-12 Hayabuchi  
Tsuzuki-ku  
Yokohama City, Japan 2240025  
Tel: 81 45 593 7300  
Fax: 81 45 593 7301

### KOREA

Graco Korea Inc.  
Shinhan Bank Building  
4th Floor #1599  
Gwanyang-Dong, Dongan-Ku,  
Anyang-si, Korea 431-060  
Tel: 82 31 476 9400  
Fax: 82 31 476 9801

## SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

**877-84GRACO (1-877-844-7226)** or visit us at [www.graco.com](http://www.graco.com).

Graco Inc. is registered to I.S. EN ISO 9001

North America  
Customer Service  
800-328-0211  
Fax 877-340-6427